




mediaport™ LTE

Mobile broadband has never been this reliable

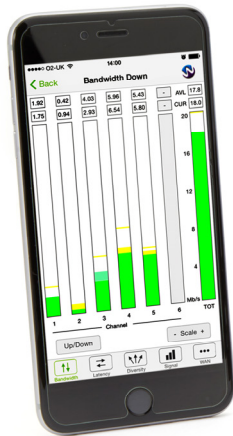

iPhone 6 shown for comparison



wired broadcast

Static or mobile, indoors or out - **Mediaport™** can deliver **Mission-Critical** connectivity with **Grab & Go** simplicity.

- Bonds 4 x 4G (or 3G) and 1 x Ethernet WAN
- Real bonding - aggregates bandwidth upstream, and down
- Internal battery and fast charger, with UPS functionality
- Battery life up to 6 hours
- 2.4/5GHz W-LAN and GB Ethernet LAN, GPS
- Use for internet access or site-site 256Bit SSL/AES encrypted VPN
- Compact, rugged and lightweight
- Weather-resistant shoulder bag or hard case (optional)

Simply switch Mediaport on, connect to its Wi-Fi and enjoy the speed, coverage and resilience of four 4G networks combined. With built-in main antenna for 4G, Wi-Fi and GPS, Mediaport is user-friendly and ultra-mobile. Use Mediaport on site, on the street or on the move to deliver fast, reliable connectivity in seconds.

Compatible with Viprinet® RuggedVPN™ firmware only.
Mediaport™ uses Viprinet® technology and must connect to a Viprinet® Multichannel VPN Hub™



mobile connectivity powered by Viprinet®

Specifications

Model MP-LTE

| | |
|---|---|
| LAN | 1 x GB Ethernet |
| W-LAN | 2.4/5GHz Dual Band 802.11a/b/g/n |
| WAN | 4 x LTE/DC-HSPA+ modems with hot-swap SIM carriers 1 x GB Ethernet |
| GPS | L1 Band with 1.57 GHz |
| Frequency Bands (Europe and Australia version) | LTE-FDD Band 1/3/7/8/20 (2100/1800/2600/900/800 MHz) HSPA+/UMTS Band 1/2/5/8 (2100/1900/850/900 MHz) GSM/GPRS/EDGE (850/900/1800/1900 MHz) |
| Frequency Bands (USA and Canada version) | LTE-FDD Band 2/4/5/13/17/25 (1900/AWS/850/700/700/1900 MHz) HSPA+/UMTS Band 1/2/4/5/8 (2100/1900/AWS/850/900 MHz) CDMA/EV-DO Band BC0/BC1/BC10 (800/1900/1700 MHz) GSM/GPRS/EDGE (850/900/1800/1900 MHz) |
| Antenna | Embedded MAIN antenna for LTE/DC-HSPA+, WLAN and GPS (optional) 2 x External AUX antenna for LTE/DC-HSPA+ on front panel SMA 2 x External AUX antenna for WLAN on rear panel RP-SMA |
| Power | Internal 73Whr rechargeable Li-Ion battery / charger 100-240V AC mains adaptor or 12V vehicle power cable (supplied) External 12-24V DC @ 4.3A, XLR 4 pin USB power output 5V @ 1A |
| Working Temperature | 0 - 40°C |
| Dimensions & Weight | 200 x 94 x 266mm, 2.4kG |
| Compatible Firmware | Viprinet® RuggedVPN™ only |

Accessories

| | |
|---------------------|---------------------------|
| Fabric Shoulder Bag | Viprinet Feature Licenses |
| Foamed Hard Case | iOS Monitoring Tool |
| Replacement Battery | |

Manufactured by
Wired Broadcast Ltd
Berol House
25 Ashley Road
London N17 9LJ, UK

+44 (0)20 3376 7710
www.wiredbroadcast.com

Specifications subject to change without notice
The Viprinet® logo is the registered trademark of Viprinet Europe GmbH

